

FTS TBプーリ 適用ブッシング型番表

(単位:mm)

SPB		溝数				
PD	OD	2	3	4	5	6
データ径	外径					
100	107		-	-	-	-
106	113	1610	-	-	-	-
112	119		-	-	-	-
118	125		-	-	-	-
125	132				-	2012
132	139	2012			-	
135	142					-
140	147				-	-
145	152				-	-
150	157				-	-
155	162					
160	167					3020
165	172					-
170	177					
175	182					
180	187					3020
185	192					-
190	197		2517			
195	202					
200	207					
206	213					
212	219					3020
218	225					
224	231					
230	237					
236	243					3535
250	257					
265	272		3020			
280	287					
300	307					
315	322					
335	342					
355	362		3020			
375	382					
400	407					3535
425	432					
450	457					
475	482					
500	507					
560	567					
630	637					4040
710	717					
800	807					
900	907					4545

※使用ベルト:5V・5VX、B・BX、SPB


(単位:mm)

SPC		溝数	
PD	OD	3	4
データ径	外径		
180	189.6		2517
190	199.6	2517	
200	209.6		3020
206	215.6		
212	221.6		
218	227.6		
224	233.6	3020	
230	239.6		
236	245.6		
243	252.6		
250	259.6		
265	274.6		3535
280	289.6		
300	309.6		
315	324.6		
335	344.6		
355	364.6		
375	384.6	3535	
400	409.6		
425	434.6		
450	459.6		
475	484.6		
500	509.6		
530	539.6		
560	569.6		4040


※使用ベルト:C・CX、SPC (単位:mm)

SP8V		溝数	
PD	OD	4	6
データ径	外径		
295	300		
310	315		
330	335	4040	
350	355		
370	375		
395	400		
420	425		
445	450		
470	475		
495	500	4545	
555	560		
625	630		
705	710		
795	800		
895	900		
995	1000	5050	
1245	1250		
		6050	

※使用ベルト:8V

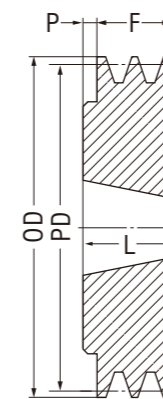

TYPE 4

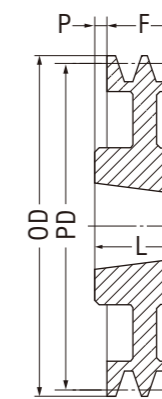

TYPE 8

(単位:mm)

品番	PD	OD	BUSHING		TYPE	L	P	R	F	質量 (KG)
	データ径	外径	品番No.	最大軸穴径	形状図番	ボス長さ	出	引込み	リム幅	
SPZ 67-1	67	71	1108	28	4	22	6	-	16	0.32
SPZ 71-1	71	75	1108	28	4	22	6	-	16	0.36
SPZ 75-1	75	79	1108	28	4	22	6	-	16	0.42
SPZ 80-1	80	84	1210	32	4	25	9	-	16	0.49
SPZ 85-1	85	89	1210	32	4	25	9	-	16	0.57
SPZ 90-1	90	94	1210	32	4	25	9	-	16	0.66
SPZ 95-1	95	99	1210	32	4	25	9	-	16	0.73
SPZ 100-1	100	104	1210	32	4	25	9	-	16	0.82
SPZ 106-1	106	110	1610	42	4	25	9	-	16	0.87
SPZ 112-1	112	116	1610	42	4	25	9	-	16	1.00
SPZ 118-1	118	122	1610	42	4	25	9	-	16	1.10
SPZ 125-1	125	129	1610	42	4	25	9	-	16	1.25
SPZ 132-1	132	136	1610	42	4	25	9	-	16	1.41
SPZ 140-1	140	144	1610	42	8	25	9	-	16	1.34
SPZ 150-1	150	154	1610	42	8	25	9	-	16	1.51
SPZ 160-1	160	164	1610	42	8	25	9	-	16	1.65
SPZ 170-1	170	174	1610	42	8	25	9	-	16	1.90
SPZ 180-1	180	184	1610	42	8	25	9	-	16	2.02
SPZ 190-1	190	194	1610	42	8	25	9	-	16	2.22
SPZ 200-1	200	204	2012	50	8	32	16	-	16	2.79
SPZ 212-1	212	216	2012	50	8	32	16	-	16	3.08